

MAKE YOUR VACATION COOL



CAMPER TRAILER AIR CONDITIONER

ASV-25A
ASV-35A



Wi-Fi control



LED display



Day timer



Comfortable sleep
mode



Filter cleaning
reminder



Refrigerant



Turbo function
for fast cooling



Clock
(remote controller)



Self-diagnosis



Stand-by
1W



Swing
(flexible adjusting
guide louvers)



Three side way
air outlet



Dehumidifying
mode



Child lock




Inbuilt
LED light

CAMPER TRAILERS SINCLAIR:

- Clean and friendly design
- Manual and remote control
- Powerful cooling, heating and dehumidification
- Quiet operation
- Closable air outlets




MAKE YOUR VACATION COOL

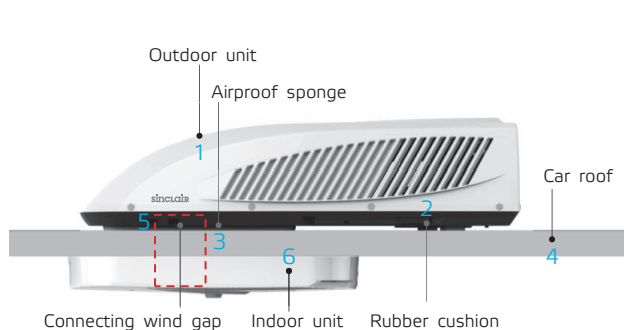

- Possibility of control via Wi-Fi
- Operating temperature 2-43 °C
- For roofs with a thickness of 30-80 mm
- Power supply 220-240V/50Hz/1Ph
- Compressor protection



Easy installation of SMART app
Possibility of 4 device control
Basic mode control
Weekly timer

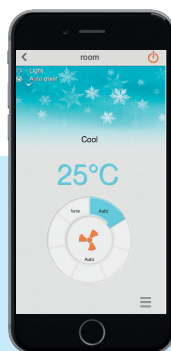

TECHNICAL PARAMETERS

MODEL			ASV-25A	ASV-35A
Capacity cooling / heating	kW		2,5 / 2,2	3,5 / 3,2
Power supply	V / Hz / Ph		~ 220-240 / 50 / 1	~ 220-240 / 50 / 1
Power input cooling / heating	W		1070 / 980	1270 / 1180
Rated power input	W		1400	1550
Power current cooling / heating	A		4,7 / 4,2	5,6 / 5,2
Rated power current	A		6,6	9,5
EER / COP	-		2,33 / 2,22	2,75 / 2,22
Air flow	indoor	m³ / h	340 / 280 / 220 / 190	380 / 320 / 260 / 230
Air flow	outdoor	m³ / h	600 / 300	600 / 300
Sound pressure level	indoor	dB(A)	58 / 54 / 46 / 37	55 / 49 / 44 / 39
	outdoor	dB(A)	65 / 55	65 / 55
Sound power level	indoor	dB(A)	63 / 58 / 53 / 48	65 / 59 / 54 / 49
	outdoor	dB(A)	75 / 65	75 / 65
Dehumidifying volume	l / h		1,0	1,5
IP protection	outdoor		IPX4	IPX4
Mounting hole in the roof	mm		356 x 356	356 x 356
Thickness of the roof	mm		30 - 80	30 - 80
Refrigerant	type / kg / t eq.CO ₂		R410A / 0,67 / 1,4	R410A / 0,67 / 1,4
GWP	-		2088	2088
Dimension (w x h x d)	indoor	mm	667 x 96 x 497	667 x 96 x 497
	outdoor	mm	1018 x 259 x 650	1018 x 259 x 650
Package dimension (w x h x d)	indoor	mm	738 x 153 x 590	738 x 153 x 590
	outdoor	mm	1102 x 327 x 718	1102 x 327 x 718
Net / gross weight	indoor	kg	5,5 / 8,0	5,5 / 8,0
	outdoor	kg	41,0 / 46,0	41,0 / 46,0
Set temperature range	°C		16 ~ 30	16 ~ 30
Operating temperature range	cooling	°C	18 ~ 43	18 ~ 43
	heating	°C	2 ~ 24	2 ~ 24



The specification of products is subject to change based on further development of the units by the producer and can be changed without prior notice. Refer to rating label. Contains fluorinated greenhouse gases covered by the Kyoto Protocol. R410A (50% HFC-32, 50% HFC-125), GWP of refrigerant used: 2088. Noise is tested in the semi-anechoic room, so it should be slightly higher in the actual Operation due to environmental change. Power input is tested under standard condition.



SINCLAIR CORPORATION LTD.
SINCLAIR-WORLD.COM | SINCLAIR-SOLUTIONS.COM
EMAIL: INFO@SINCLAIR-SOLUTIONS.COM

This catalogue is informative only and does not constitute a binding offer from the side of Sinclair Corporation Ltd. The pictures of units and accessories are illustrative only. The Company takes no responsibility for any damage arising out of using or interpretation of this catalogue. The contents of this catalogue is protected by copyright of SINCLAIR CORPORATION LTD.