



Mini Chillers
Modular Chillers

Fan Coil Units

2017-2018

Mini Chillers

Sinclair DC Inverter Mini Chillers adopt unitary structure design and a hydraulic module is built in the outdoor unit. It is an air-cooled water heat pump chiller so there is no need of cooling water tower at the condensing side.

Cooling capacity of DC inverter Mini Chillers range is from 5kW to 16kW and it can be freely combined with fan coil units & floor heating. These units are designed for residential applications or light commercial applications that require cold or hot water.

Modular Chillers

Sinclair DC Inverter Modular Chillers adopt inner grooved copper tube and hydrophilic aluminium fins, greatly improving heat exchange in units of 30kW and 60kW. By the maximum combination of 16 units it is possible to get 960kW capacity. These modular chillers use high efficient DC inverter compressor. The advantage of modular connection is, if one module fails, other modules can be back-up instead of the failed one to provide a continuing operation.

Chillers are freely combinable with fan coil units and air handling units. Project owners may choose the best types according to their design taste (for interior) or needs for functions.



AIR-COOLED FULL DC INVERTER

MINI CHILLERS

SCV-50EA
SCV-70EA
SCV-100EA
SCV-120EA
SCV-140EA
SCV-160EA

FEATURES

- Energy saving – energy class A+
- High efficient DC inverter compressor and DC fan motor
- Low noise emission
- Easy installation and high reliability
- Integrated and compact design - include hydraulic module
- High performance heat exchanger
- Reliable operation – built-in controller & water pressure gauge
- Water pump starts/stops compulsory function
- Built-in electronic controller
- Wide operation temperature range and outlet water temperature range

| Mode | Ambient temperature range | Water outlet temperature range |
|---------|---------------------------|--------------------------------|
| Cooling | -5 °C ~ 46 °C | 4 °C ~ 20 °C |
| Heating | -15 °C ~ 27 °C | 30 °C ~ 55 °C |

WIRED CONTROLLER KJR-120F

Optional only for SCV-100EA, SCV-120EA, SCV-140EA, SCV-160EA

- Touch key operation
- Multiple timer
- Real time clock



| Model | | SCV-50EA | SCV-70EA | SCV-100EA | SCV-120EA | SCV-140EA | SCV-160EA |
|---|---------------------|----------------------------------|---------------|---------------|-----------------|-----------------|-----------------|
| Power supply | V/Ph/Hz | 220-240/1/50 | | | 380-415/3/50 | | |
| Cooling ¹ | Capacity | kW | 5,0 (1,9~5,8) | 7,0 (2,1~7,8) | 10,0 (2,9~10,5) | 11,2 (3,1~12,0) | 12,5 (3,3~14,0) |
| | Rated input | W | 1550 | 2250 | 2950 | 3380 | 3900 |
| | Rated current | A | 6,8 | 9,9 | 13,0 | 5,5 | 6,4 |
| | EER | W/W | 3,23 | 3,11 | 3,39 | 3,31 | 3,20 |
| Cooling ² | Capacity | kW | 5,6 | 8,0 | 10,6 | 12,2 | 14,2 |
| | Rated input | W | 1150 | 1850 | 2300 | 2600 | 3100 |
| | EER | W/W | 4,87 | 4,32 | 4,24 | 4,70 | 4,58 |
| | SEER | | 5,83 | 6,07 | 5,71 | 6,18 | 6,69 |
| Heating ³ | Capacity | kW | 6,2 (2,1~7,0) | 8,0 (2,3~9,0) | 11,0 (3,2~12,0) | 12,3 (3,3~13,2) | 13,8 (3,5~15,4) |
| | Rated input | W | 1900 | 2500 | 3140 | 3720 | 4250 |
| | Rated current | A | 8,3 | 11,0 | 13,8 | 6,1 | 7,0 |
| | COP | W/W | 3,26 | 3,20 | 3,50 | 3,31 | 3,25 |
| Heating ⁴ | Capacity | kW | 6,2 | 8,6 | 11,5 | 13,0 | 15,1 |
| | Rated input | W | 1350 | 2100 | 2650 | 2850 | 3350 |
| | COP | W/W | 4,60 | 4,10 | 4,34 | 4,56 | 4,51 |
| | SCOP | | 3,55 | 3,46 | 3,34 | 3,66 | 3,78 |
| Seasonal space heating energy efficiency (ηs) | | 138,9% | 135,3% | 130,7% | 143,5% | 148,3% | 132,6% |
| Seasonal space heating energy efficiency class | | A+ | A+ | A+ | A+ | A+ | A+ |
| Max. input current | A | 11,4 | 13,7 | 25 | 8,9 | 9,6 | 10,1 |
| Compressor | Type | ROTARY | | | | | |
| Outdoor fan | Motor type | DC Motor | | | | | |
| | Air flow | m ³ /h | 5100 | 5100 | 7000 | 7000 | 7000 |
| Air heat exchanger | Type | Fin-coil | | | | | |
| Water heat exchanger | Type | Plate heat exchanger | | | | | |
| | Water volume | L | 0,53 | 0,53 | 0,70 | 0,78 | 0,78 |
| | Water flow | m ³ /h | 0,86 | 1,20 | 1,72 | 1,92 | 2,15 |
| | Water pressure drop | kPa | 15 | 15 | 18 | 18 | 18 |
| Water pump | Pump head | m | 5,5 | 5,5 | 8,5 | 8,5 | 8,5 |
| | Water volume | L/min | 4 | 4 | 4 | 4 | 4 |
| Expansion tank volume | | L | 2 | 2 | 3 | 3 | 3 |
| Refrigerant | Type | R410A | R410A | R410A | R410A | R410A | R410A |
| | Charged volume | kg / t eq. CO ₂ | 2,5 / 5,22 | 2,5 / 5,22 | 2,8 / 5,8 | 2,8 / 5,8 | 2,9 / 6,0 |
| Throttle type | | Electronic expansion valve | | | | | |
| Sound power level ⁵ | | dB(A) | 63 | 66 | 68 | 70 | 72 |
| Sound pressure level | | dB(A) | 58 | 58 | 59 | 62 | 62 |
| Unit net dimension (WxHxD) | | mm | 990x966x354 | 990x966x354 | 970x1327x400 | 970x1327x400 | 970x1327x400 |
| Packing dimension (WxHxD) | | mm | 1120x1100x435 | 1120x1100x435 | 1082x1456x435 | 1082x1456x435 | 1082x1456x435 |
| Net / Gross weight | | kg | 81/91 | 81/91 | 110/121 | 110/121 | 111/122 |
| The Max. and Min. water inlet pressure ⁶ | | kPa | 500/150 | 500/150 | 500/150 | 500/150 | 500/150 |
| Pipe connections | Water inlet/outlet | inch | 1 | 1 | 1-1/4 | 1-1/4 | 1-1/4 |
| Controller | | Electronic controller (standard) | | | | | |
| Ambient temperature range | Cooling | °C | -5~46 | -5~46 | -5~46 | -5~46 | -5~46 |
| | Heating | °C | -15~27 | -15~27 | -15~27 | -15~27 | -15~27 |
| Water outlet temperature range | Cooling | °C | 4~20 | 4~20 | 4~20 | 4~20 | 4~20 |
| | Heating | °C | 30~55 | 30~55 | 30~55 | 30~55 | 30~55 |

Nominal capacity is based on the following conditions:

1. Condenser air in 35 °C. Evaporator water in/out 12/7 °C
2. Condenser air in 35 °C. Evaporator water in/out 23/18 °C
3. Evaporator air in 7 °C 85% R.H. Condenser water in/out 40/45 °C
4. Evaporator air in 7 °C 85% R.H. Condenser water in/out 30/35 °C
5. 1 m far from fan side of unit in open field
6. The maximum and minimum operating pressure values refer to the activation of the pressure switches
7. The above data test reference standard EN14511:2014; EN14825:2016; EN50564:2011; EN12102:2014; (EU)No:811:2013; (EU)No:813:2013

The specification of products is subject to change based on further development of the units by the producer and can be changed without prior notice. Refer to rating label.
 Contains fluorinated greenhouse gases covered by the Kyoto Protocol. R410A (50% HFC-32, 50% HFC-125), GWP of refrigerant used: 2088. Noise is tested in the semi-anechoic room, so it should be slightly higher in the actual operation due to environmental change. Power input is tested under standard condition.

AIR-COOLED FULL DC INVERTER

MODULAR CHILLERS

SCV-300EA
SCV-600EA

FEATURES

- Modular design concept
- Combination of up to 16 modules
- Each module can be set a master unit and each module can also be set as a slave unit
- Easy connection of the main unit and slave units
- All units can be connected together with a three-core wired controller in series type
- On PCB you can remotely control: ON/OFF, heating/cooling, alarm
(Note: when using the remote control function, the wired controller is out of operation.)
- Easy transportation and installation back-up functions (in combined system) - if one module fails, other modules are back-up for the failed one to provide a continuing operation
- High efficient full DC inverter compressor
- Economical operation
- Flexible pipe connection and installation

| Mode | Ambient temperature range | Water outlet temperature range |
|----------------|---------------------------|--------------------------------|
| Cooling | -15 °C ~ 52 °C | 0 °C ~ 20 °C * |
| Heating | -15 °C ~ 24 °C | 25 °C ~ 55 °C |

* (For less than 5 °C necessary to add antifreeze)



| Model | | SCV-300EA | | SCV-600EA |
|-----------------------------------|-----------------------|---------------------------------------|---|---------------------------------------|
| Power supply | | V/Ph/Hz | | |
| Cooling ¹ | Capacity | kW | 27 | 55 |
| | Input | kW | 10,8 | 22 |
| | EER | - | 2,50 | 2,50 |
| Heating ² | Capacity | kW | 31 | 61 |
| | Input | kW | 10,5 | 20,3 |
| | COP | - | 2,95 | 3,00 |
| Max. running current | | A | 18,0 | 36,8 |
| Compressor | Type | - | DC invertor rotary | DC invertor rotary |
| | Quantity | Pieces | 1 | 2 |
| Air side heat exchanger | Type | - | Finned tube | Finned tube |
| | Quantity of fan motor | Pieces | 1 | 2 |
| | Air flow | m ³ /h | 12 500 | 24 000 |
| Water side heat exchanger | Type | - | Plate | Plate |
| | Water pressure drop | kPa | 60 | 80 |
| | Volume | L | 2,44 | 5,17 |
| | Water flow volume | m ³ /h | 5 | 9,8 |
| Refrigerant | Type | - | R410A | R410A |
| | Charged volume | kg / t eq. CO ₂ | 10,5 / 21,9 | 17 / 35,5 |
| | Throttle type | - | EXV + Capillary | EXV + Capillary |
| Sound pressure level ³ | | dB(A) | 66 | 72 |
| Unit net dimension (DxHxW) | | mm | 1870x1175x1000 | 2220x1325x1055 |
| Packing dimension (DxHxW) | | mm | 1910x1225x1035 | 2250x1370x1090 |
| Net / Gross weight | | kg | 300/310 | 480/490 |
| Pipe connections | Water inlet/outlet | mm | DN40 | DN50 |
| Water pipe connection type | | - | Threaded connection | Clasp connection |
| Controller | | Wired controller KJRM-120H (standard) | | Wired controller KJRM-120H (standard) |
| Ambient temperature range | Cooling | °C | -15~52 | |
| | Heating | °C | -15~24 | |
| Water outlet temperature range | Cooling | °C | 0~20 (less than 5 °C must add antifreeze) | |
| | Heating | °C | 25~55 | |

SCV-300EA, SCV-600EA don't include hydraulic module due to variabilities of particular projects.

1. Cooling: Chilled water inlet/outlet temperature: 12/7 °C, outdoor ambient temperature 35 °C DB.

2. Heating: Warm water inlet/outlet temperature: 40/45 °C, outdoor ambient temperature 7 °C DB/6 °C WB.

3. Sound pressure level is measured at a position 1m in front of the unit and 1.1m above the floor in a semi-anechoic chamber.

Water side fouling factor: 0.086m² °C /kW.

The specification of products is subject to change based on further development of the units by the producer and can be changed without prior notice. Refer to rating label.

Contains fluorinated greenhouse gases covered by the Kyoto Protocol. R410A (50% HFC-32, 50% HFC-125), GWP of refrigerant used: 2088. Noise is tested in the semi-anechoic room, so it should be slightly higher due to change of location. Power input is tested under standard conditions.

Fan Coil Units


C2
C4
H
D3
F
SF

TYPE OF UNIT

- FOUR-WAY CASSETTE UNIT, 2 PIPES
- FOUR-WAY CASSETTE UNIT, 4 PIPES
- WALL MOUNTED UNIT, 2 PIPES
- DUCT, 3 ROWS, 2 PIPES
- FLOOR CEILING, 2 PIPES
- DESIGNATION FOR SINCLAIR FAN COIL

ADVANTAGE OF FAN COIL UNITS WITH DC BRUSHLESS FAN MOTOR

The DC fan coil units are the new energy saving products improved with advanced DC driven technology. The DC fan coil units have advanced technology of high energy efficiency, low noise operation and precise temperature control, so they are ideal for hospitals, office buildings, hotels, airports and various other applications.

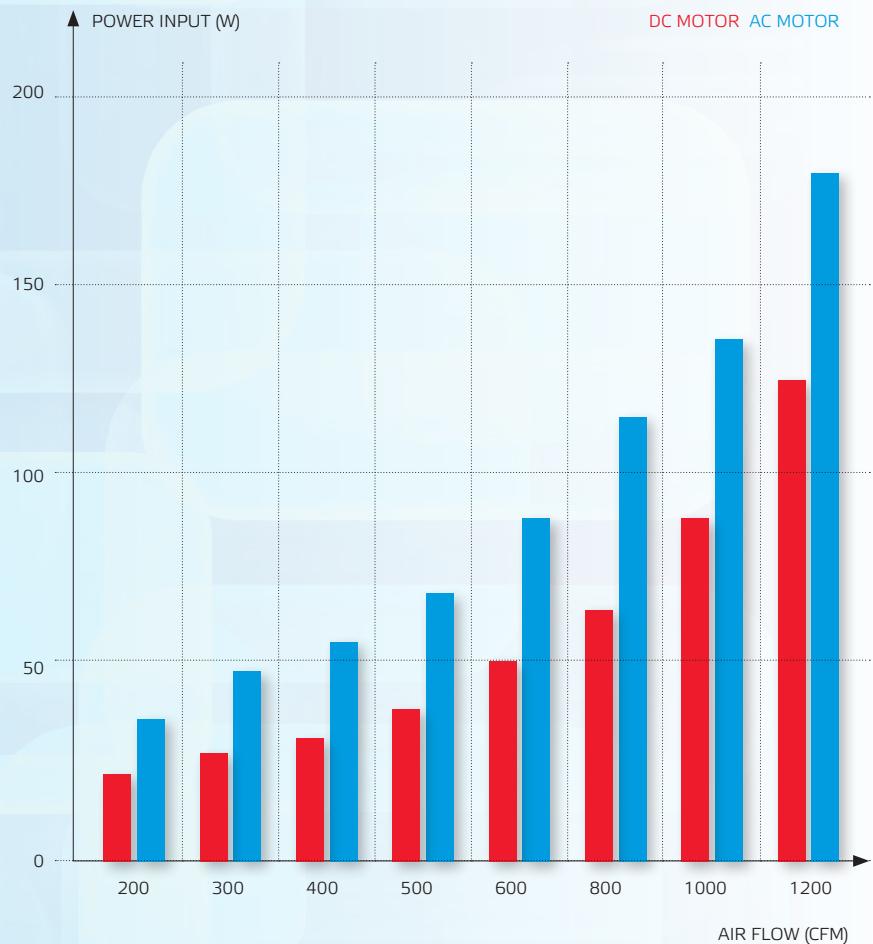

HIGH EFFICIENCY AND ENERGY SAVING

Sinclair DC FCU adopts the brushless DC motor whose efficiency is up to 90%. In contrast with the original FCU, DC FCU power consumption can be reduced by more than 30%.

FOUR-WAY CASSETTE, 2 PIPES

FAN COIL UNITS

FEATURES

- Fresh air connection
- Possibility of air outlet into small room
- Possibility of Modbus connection port
- DC brushless fan motor
- Drainage water pump
- High efficient heat exchanger
- Advanced 3D spiral fan
- Long term filter



FOUR-WAY CASSETTE, 2 PIPES HAVE REMOTE CONTROLLER RM05 AS STANDARD

TECHNICAL SPECIFICATIONS

| Model | | | SF-300C2 | SF-400C2 | SF-500C2 | SF-600C2 | SF-750C2 | SF-850C2 | SF-950C2 | SF-1500C2 |
|------------------------------|-------------------------|------------------------------------|---------------|----------------|----------------|----------------|----------------|---------------|----------------|------------------|
| Power supply | V/Ph/Hz | | | | | 220-240/1/50 | | | | |
| Air flow (H/M/L) | m³/h | 560/392/280 | 717/502/359 | 785/550/393 | 1133/793/567 | 1255/879/628 | 1441/1009/721 | 1494/1046/747 | 1850/1295/925 | |
| | CFM | 330/231/165 | 422/296/211 | 462/324/231 | 667/467/334 | 739/517/370 | 848/594/424 | 879/616/440 | 1089/762/544 | |
| Cooling | Capacity (H/M/L) | kW | 3,02/2,3/1,75 | 3,93/3,07/2,48 | 4,24/3,31/2,67 | 5,58/4,35/3,52 | 5,77/4,5/3,63 | 6,84/5,33/4,3 | 6,99/5,27/4,16 | 10,64/8,09/6,6 |
| | Water flow rate | L/h | 519 | 676 | 729 | 960 | 992 | 1176 | 1202 | 1830 |
| | Water pressure drop | kPa | 7,4 | 12,0 | 16,0 | 21,0 | 28,0 | 27,0 | 25,0 | 36,0 |
| Heating | Capacity (H/M/L) | kW | 4,1/3,0/2,22 | 5,34/4,0/3,15 | 5,77/4,33/3,4 | 7,72/5,92/4,5 | 8,15/6,12/4,65 | 9,37/7,25/5,5 | 9,52/7,35/5,32 | 14,38/11,29/8,44 |
| | Water pressure drop | kPa | 8,0 | 10,6 | 15,0 | 22,0 | 26,0 | 23,0 | 20,0 | 34,0 |
| Power input | W | 22,7 | 27,0 | 32,0 | 42,0 | 50,0 | 64,0 | 71,0 | 124,0 | |
| Sound pressure level (H/M/L) | dB(A) | 34/29/21 | 40/36/28 | 43/37/30 | 42/33/26 | 45/37/28 | 46/36/28 | 47/37/31 | 50/40/33 | |
| Fan motor | Type | DC motor | | | | | | | | |
| | Quantity | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 |
| Fan | Type | Centrifugal, forward-curved Blades | | | | | | | | |
| | Quantity | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 |
| Coil | Row | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 3 |
| | Max. working pressure | MPa | 1,6 | 1,6 | 1,6 | 1,6 | 1,6 | 1,6 | 1,6 | 1,6 |
| | Diameter | mm | Φ7 | Φ7 | Φ7 | Φ7 | Φ7 | Φ7 | Φ7 | Φ7 |
| Panel | Net dimensions (WxHxD) | mm | 647x50x647 | 647x50x647 | 647x50x647 | 950x45x950 | 950x45x950 | 950x45x950 | 950x45x950 | 950x45x950 |
| | Packing size (WxHxD) | mm | 715x123x715 | 715x123x715 | 715x123x715 | 1035x90x1035 | 1035x90x1035 | 1035x90x1035 | 1035x90x1035 | 1035x90x1035 |
| | Net weight | kg | 2,5 | 2,5 | 2,5 | 6,0 | 6,0 | 6,0 | 6,0 | 6,0 |
| | Gross weight | kg | 4,5 | 4,5 | 4,5 | 9,0 | 9,0 | 9,0 | 9,0 | 9,0 |
| Body | Net dimensions (WxHxD) | mm | 575x261x575 | 575x261x575 | 575x261x575 | 840x230x840 | 840x230x840 | 840x300x840 | 840x300x840 | 840x300x840 |
| | Packing size (WxHxD) | mm | 675x320x675 | 675x320x675 | 675x320x675 | 900x260x900 | 900x260x900 | 900x330x900 | 900x330x900 | 900x330x900 |
| | Net weight | kg | 16,5 | 16,5 | 16,5 | 23,0 | 23,0 | 27,0 | 27,0 | 29,5 |
| | Gross weight | kg | 22,5 | 22,5 | 22,5 | 28,0 | 28,0 | 33,0 | 33,0 | 34,5 |
| Pipe connections | Water inlet/outlet pipe | inch | G3/4 | G3/4 | G3/4 | RC3/4 | RC3/4 | RC3/4 | RC3/4 | RC3/4 |
| | Drain pipe | mm | Φ25 | Φ25 | Φ25 | Φ32 | Φ32 | Φ32 | Φ32 | Φ32 |

1. H: High fan speed; M: Medium fan speed; L: Low fan speed.

2. Cooling conditions: entering water 7 °C, temperature rise 5 °C, entering air temperature 27 °C DB/19 °C WB.

Heating conditions: entering water 50 °C, entering air temperature 20 °C DB, the same water flow as the cooling conditions.

3. Noise is tested in a semi-anechoic test room.

FOUR-WAY CASSETTE, 4 PIPES

FAN COIL UNITS

FEATURES

- Independent connection to the heating and cooling circuits
- Fresh air connection
- Possibility of air outlet into small room
- Possibility of Modbus connection port
- DC brushless fan motor
- Drainage water pump
- High efficient heat exchanger
- Advanced 3D spiral fan
- Long term filter



FOUR-WAY CASSETTE, 4 PIPES HAVE
REMOTE CONTROLLER RM05 AS STANDARD

TECHNICAL SPECIFICATIONS

| Model | | SF-300C4 | SF-400C4 | SF-500C4 | SF-600C4 | SF-750C4 | SF-950C4 | SF-1200C4 |
|----------------------|-------------------------|-------------|-----------------------------------|---------------|------------------------------------|-------------------------------------|----------------|----------------|
| Power supply | V/Ph/Hz | | | | 220-240/1/50 | | | |
| Air flow (H/M/L) | m ³ /h | 560/397/284 | 717/502/359 | 785/550/393 | 1187/831/594 | 1233/863/617 | 1526/1068/763 | 1768/1238/884 |
| | CFM | 334/234/167 | 422/286/211 | 462/324/231 | 700/489/350 | 726/508/363 | 898/629/449 | 1041/729/520 |
| Cooling | Capacity (H/M/L) | kW | 2,39/1,82/1,46 | 2,88/2,19/1,8 | 3,24/2,46/2,04 | 4,94/3,77/3,13 | 5,18/3,94/3,26 | 5,61/4,26/3,53 |
| | Water flow rate | L/h | 411 | 495 | 558 | 850 | 891 | 965 |
| | Water pressure drop | kPa | 19,1 | 14,5 | 20,9 | 15,0 | 12,0 | 15,0 |
| Heating | Capacity (H/M/L) | kW | 3,92/2,98/2,47 | 4,73/3,6/2,98 | 4,93/3,75/3,11 | 7,14/5,42/4,5 | 7,41/5,64/4,67 | 8,24/6,26/5,19 |
| | Water flow rate | L/h | 337 | 407 | 424 | 614 | 637 | 709 |
| | Water pressure drop | kPa | 20,5 | 29,1 | 34,5 | 40,0 | 42,0 | 49,0 |
| Power input | W | 15 | 27 | 39 | 47 | 50 | 71 | 106 |
| Sound pressure level | dB(A) | 34/26/20 | 36/28/22 | 40/31/25 | 40/31/25 | 42/34/26 | 45/35/29 | 46/37/32 |
| Fan motor | Type | | | | DC motor | | | |
| | Quantity | 1 | 1 | 1 | 1 | 1 | 1 | 1 |
| Fan | Type | | | | Centrifugal, forward-curved Blades | | | |
| | Quantity | 1 | 1 | 1 | 1 | 1 | 1 | 1 |
| Coil | Row | 2 | 2 | 2 | 2 | 2 | 2 | 3 |
| | Max. working pressure | MPa | 1,6 | 1,6 | 1,6 | 1,6 | 1,6 | 1,6 |
| | Diameter | mm | Φ7 | Φ7 | Φ7 | Φ7 | Φ7 | Φ7 |
| Panel | Net dimensions (WxHxD) | mm | 647x50x647 | 647x50x647 | 647x50x647 | 950x45x950 | 950x45x950 | 950x45x950 |
| | Packing size (WxHxD) | mm | 715x123x715 | 715x123x715 | 715x123x715 | 1035x90x1035 | 1035x90x1035 | 1035x90x1035 |
| | Net weight | kg | 2,5 | 2,5 | 2,5 | 6,0 | 6,0 | 6,0 |
| | Gross weight | kg | 4,5 | 4,5 | 4,5 | 9,0 | 9,0 | 9,0 |
| Body | Net dimensions (WxHxD) | mm | 575x261x575 | 575x261x575 | 575x261x575 | 840x300x840 | 840x300x840 | 840x300x840 |
| | Packing size (WxHxD) | mm | 675x320x675 | 675x320x675 | 675x320x675 | 900x307x900 | 900x307x900 | 900x330x900 |
| | Net weight | kg | 16,7 | 16,7 | 16,7 | 27,5 | 27,5 | 30,0 |
| | Gross weight | kg | 22,7 | 22,7 | 22,7 | 33,5 | 33,5 | 35,0 |
| Pipe connections | Water inlet/outlet pipe | inch | Cold water: G3/4; Hot water: G1/2 | | | Cold water: RC3/4; Hot water: RC1/2 | | |
| | Drain pipe | mm | Φ25 | Φ25 | Φ25 | Φ32 | Φ32 | Φ32 |

1. H: High fan speed; M: Medium fan speed; L: Low fan speed.
2. Cooling conditions: entering water 7 °C, temperature rise 5 °C, entering air temperature 27 °C DB/19 °C WB.
Heating conditions: entering water 70 °C, temperature drop 10 °C DB, entering air temperature 20 °C DB.
3. Noise is tested in a semi-anechoic test room.

WALL MOUNTED UNITS, 2 PIPES

FAN COIL UNITS

FEATURES

- Digital LED display
- Easy installation
- Built-in 3-way electromagnetic valve
- Possibility of Modbus connection port
- DC fan motor
- Auto swing louver



WALL MOUNTED UNITS HAVE
REMOTE CONTROLLER RM05 AS STANDARD

TECHNICAL SPECIFICATIONS

| Model | | | SF-250H | SF-400H | SF-600H |
|------------------------------|-----------------------|--------------|----------------|----------------|---------------|
| Power supply | V/Ph/Hz | | 220-240/1/50 | | |
| Air flow (H/M/L) | m ³ /h | 425/410/320 | 680/550/504 | 1020/820/670 | |
| | CFM | 250/241/188 | 400/324/297 | 600/483/394 | |
| Cooling | Capacity (H/M/L) | kW | 2,63/2,2/1,97 | 3,28/2,90/2,66 | 5,0/3,95/3,21 |
| | Water flow rate | L/h | 452 | 564 | 860 |
| | Water pressure drop | kPa | 23,1 | 42,0 | 36,3 |
| Heating | Capacity (H/M/L) | kW | 3,36/2,85/2,35 | 4,37/3,77/3,35 | 6,7/5,17/4,18 |
| | Water pressure drop | kPa | 22,0 | 40,0 | 32,8 |
| Power input | W | 10,7 | 33,0 | 37,5 | |
| Sound pressure level (H/M/L) | dB(A) | 30/26/23 | 36/32/29 | 40/36/31 | |
| Fan motor | Type | | DC Motor | | |
| | Quantity | 1 | 1 | 1 | 1 |
| Fan | Type | | Tangential fan | | |
| | Quantity | 1 | 1 | 1 | 1 |
| Coil | Row | 2 | 2 | 2 | 2 |
| | Max. working pressure | MPa | 1,6 | 1,6 | 1,6 |
| | Diameter | mm | Φ7 | Φ7 | Φ7 |
| Net dimensions (WxHxD) | mm | 915x290x230 | 915x290x230 | 1072x315x230 | |
| Packing size (WxHxD) | mm | 1020x390x315 | 1020x390x315 | 1180x415x315 | |
| Net weight | kg | 12,7 | 12,7 | 14,9 | |
| Gross weight | kg | 17,3 | 17,3 | 18,6 | |
| Water inlet/outlet pipe | inch | G3/4 | G3/4 | G3/4 | |
| Drain pipe | mm | Φ20 | Φ20 | Φ20 | |

1. H: High fan speed; M: Medium fan speed; L: Low fan speed.
2. Cooling conditions: entering water 7 °C, temperature rise 5 °C, entering air temperature 27 °C DB/19 °C WB.
Heating conditions: entering water 50 °C, entering air temperature 20 °C DB, the same water flow as the cooling conditions.
3. Noise is tested in a semi-anechoic test room.

DUCT, 3 ROWS, 2 PIPES

FAN COIL UNITS

FEATURES

- Intelligent electronic control
- High efficient heat exchanger
- Longer V shape drainage pan
- Possibility of Modbus connection port
- DC brushless fan motor
- Fresh air intake



OPTIONAL WIRED CONTROLLER
KJR-18B FOR DUCT FAN COIL UNITS

TECHNICAL SPECIFICATIONS

| Model | | SF-200D3 | SF-400D3 | SF-600D3 | SF-1000D3 | |
|-----------------------------------|-----------------------|-------------|---|--------------|---------------|--|
| Power supply | V/Ph/Hz | | 220-240/1/50 | | | |
| Air flow (H/M/L) | m³/h | 340/255/170 | 680/510/340 | 1020/765/510 | 1700/1275/850 | |
| | CFM | 200/150/100 | 400/300/200 | 600/450/300 | 1000/750/500 | |
| Standard external static pressure | Pa | | 12Pa (default); 30/50Pa can be set through dial switch on PCB | | | |
| Cooling | Capacity (H/M/L) | kW | 2,2/1,9/1,68 | 4/3,4/2,95 | 5,8/4,88/4,45 | |
| | Water flow rate | L/h | 378 | 688 | 998 | |
| | Water pressure drop | kPa | 9,4 | 9,7 | 30,1 | |
| Heating | Capacity (H/M/L) | kW | 3,5/3,08/2,59 | 6,8/5,85/5,1 | 9,8/8,6/7,4 | |
| | Water pressure drop | kPa | 8,2 | 11,4 | 25,0 | |
| Power input | W | 16 | 28 | 45 | 90 | |
| Sound pressure level | 12Pa (H/M/L) | dB(A) | 36/32/26 | 37/34/27 | 39/36/29 | |
| | 30Pa (H/M/L) | dB(A) | 40/36/29 | 42/38/31 | 44/40/33 | |
| | 50Pa (H/M/L) | dB(A) | 42/39/31 | 45/41/33 | 47/43/35 | |
| Fan motor | Type | | DC motor | | | |
| | Quantity | 1 | 1 | 1 | 2 | |
| Fan | Type | | Centrifugal, forward-curved Blades | | | |
| | Quantity | 1 | 2 | 2 | 4 | |
| Coil | Row | 3 | 3 | 3 | 3 | |
| | Max. working pressure | MPa | 1,6 | 1,6 | 1,6 | |
| | Diameter | mm | Φ9,52 | Φ9,52 | Φ9,52 | |
| Net dimensions (WxHxD) | mm | 741x241x522 | 941x241x522 | 1161x241x522 | 1566x241x522 | |
| Packing size (WxHxD) | mm | 790x260x550 | 990x260x550 | 1210x260x550 | 1615x260x550 | |
| Net weight | kg | 16,7 | 21,0 | 23,7 | 34,7 | |
| Gross weight | kg | 19,7 | 24,0 | 27,2 | 39,2 | |
| Water inlet/outlet pipe | inch | RC3/4 | RC3/4 | RC3/4 | RC3/4 | |
| Drain pipe | inch | R3/4 | R3/4 | R3/4 | R3/4 | |

1. H: High fan speed; M: Medium fan speed; L: Low fan speed.

2. Air flow rate at 0Pa ESP.

3. Cooling conditions: entering water 7 °C, temperature rise 5 °C, entering air temperature 27 °C DB/19 °C WB.
Heating conditions: entering water 50 °C, entering air temperature 20 °C DB, the same water flow as the cooling conditions.

4. Noise is tested in a semi-anechoic test room.

FLOOR CEILING, 2 PIPES

FAN COIL UNITS

FEATURES

- High efficiency and low noise operation
- Horizontal or vertical installation
- Adjustable louver for wide angle of air flow
- DC brushless fan motor



OPTIONAL WIRED CONTROLLER KJR-15B
FOR FLOOR CEILING FAN COIL UNITS

TECHNICAL SPECIFICATIONS

| Model | | | SF-250F | SF-400F | SF-500F | SF-800F |
|-------------------------|------------------------|-------------|----------------|------------------------------------|----------------|----------------|
| Power supply | V/Ph/Hz | | | 220-240/1/50 | | |
| Air flow (H/M/L) | m³/h | 425/360/320 | 680/580/510 | 850/720/640 | 1360/1160/1020 | |
| | CFM | 250/210/190 | 400/340/300 | 500/420/375 | 800/680/600 | |
| Cooling | Capacity (H/M/L) | kW | 1,87/1,50/1,20 | 3,27/2,60/1,86 | 4,85/3,61/2,61 | 6,52/5,29/4,00 |
| | Water flow rate | L/h | 321 | 562 | 834 | 1121 |
| | Water pressure drop | kPa | 9,6 | 19,3 | 27,7 | 26,5 |
| Heating | Capacity (H/M/L) | kW | 2,53/1,91/1,47 | 4,58/3,49/2,47 | 6,98/5,12/3,67 | 9,58/7,58/5,68 |
| | Water pressure drop | kPa | 7,7 | 16,6 | 23,1 | 19,8 |
| Power input | | W | 16 | 33 | 35 | 70 |
| Sound pressure level | (H/M/L) | dB(A) | 31/27/21 | 35/31/25 | 39/34/28 | 42/36/30 |
| Fan motor | Type | | | DC motor | | |
| | Quantity | | 1 | 1 | 1 | 1 |
| Fan | Type | | | Centrifugal, forward-curved Blades | | |
| | Quantity | | 1 | 2 | 2 | 3 |
| Coil | Row | | 3 | 2 | 3 | 2 |
| | Max. working pressure | MPa | 1,6 | 1,6 | 1,6 | 1,6 |
| | Diameter | mm | Φ9,52 | Φ9,52 | Φ9,52 | Φ9,52 |
| Body | Net dimensions (WxHxD) | mm | 800x592x220 | 1000x592x220 | 1200x592x220 | 1500x592x220 |
| | Packing size (WxHxD) | mm | 889x683x312 | 1089x683x312 | 1289x683x312 | 1589x683x312 |
| | Net weight | kg | 24,4 | 28,2 | 34,2 | 40,0 |
| | Gross weight | kg | 28,4 | 33,2 | 39,7 | 45,5 |
| Water inlet/outlet pipe | | inch | G3/4 | G3/4 | G3/4 | G3/4 |
| Drain pipe | | mm | Φ16 | Φ16 | Φ16 | Φ16 |

1. H: High fan speed; M: Medium fan speed; L: Low fan speed.
2. Cooling conditions: Entering water 7 °C, leaving water 12 °C, Entering air temperature 27 °C DB/19 °C WB.
Heating conditions: Entering water 50 °C, the same water flow as the cooling conditions, Entering air temperature 20 °C DB.
3. Noise is tested in a semi-anechoic test room.

CONTROL SYSTEM

MODULAR CHILLERS

KJRM-120H LONWORKS (BMS) GATEWAY MODBUS GATEWAY

WIRED CONTROLLER


KJRM-120H - STANDARD



- Parameter setting and display
- Real time clock control
- Manual reset
- Hysteresis temperature setting
- Touch key operation
- Compatible gateway: Modbus

BMS GATEWAY LONWORKS CCM07

- Controls central building management system (BMS)
- Main settings of LonWorks: operation mode, outlet water temperature, hysteresis temperature and clear alarm

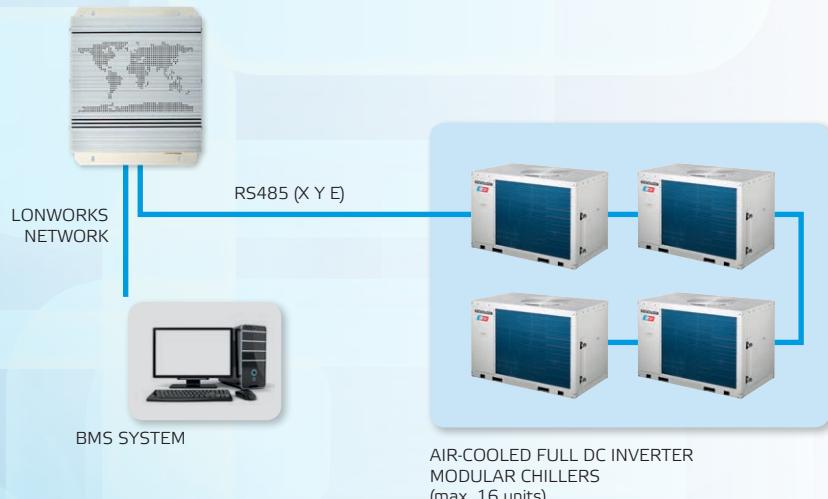

AIR-COOLED FULL DC INVERTER
MODULAR CHILLERS
(max. 16 units)

MODBUS GATEWAY

- Possible to connect up to 16 wired controllers KJRM-120H



ACCESSORIES FOR FAN COIL UNITS



RM05

Infrared controller for cassettes and wall-mounted fan coil units.



KJR-29B

Wall mounted wired controller with modern design including temperature sensor. Possible to use °C or °F. For cassettes and wall-mounted fan coil units.



KJR-18B

Wall mounted wired controller for duct fan coil units.

KJR-15B

Wired controller for floor-ceiling fan coil units.



FCUKZ-03

Connection kit including wired controller KJR-29B and infrared sensor which allows to connect CCMxx, IMM or BMS. Used for duct and floor-ceiling fan coil units.



CCM09, CCM10

Central wired controller with cooling/heating priority setting (CCM09 with weekly timer).



CCM30

Central wired controller with modern design and touchpads.



SINCLAIR CORPORATION LTD.
SINCLAIR-WORLD.COM | SINCLAIR-SOLUTIONS.COM
EMAIL: INFO@SINCLAIR-SOLUTIONS.COM

This catalogue is informative only and does not constitute a binding offer from the side of Sinclair Corporation Ltd. The pictures of units and accessories are illustrative only. The Company takes no responsibility for any damage arising out of using or interpretation of this catalogue. The contents of this catalogue is protected by copyright of SINCLAIR CORPORATION LTD.