


FOCUS SERIJA



ASH-09BIF
ASH-13BIF
ASH-18BIF
ASH-24BIF

- Energetski razred A++/A+
- Odvod kondenzata na obje strane.
- Skriveni zaslon
- "I Feel" funkcija

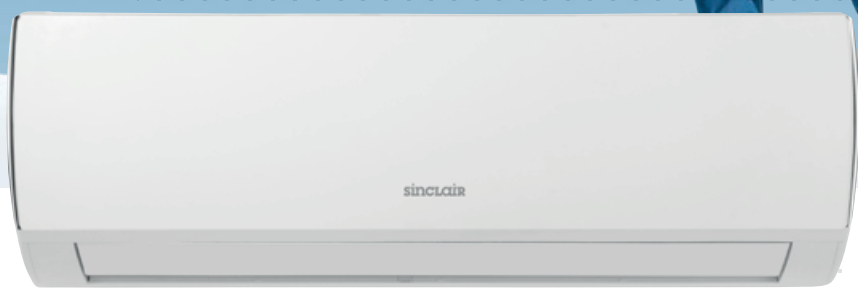

PLASMA+TEC DC INVERTER

STANDARDNA OPREMA

- Standardni filteri - katehinski filter SAF-OPWC4 i aktivni ugljeni filter SAF-OPWA4
- Hladna plazma generator
- Wifi modul
- "Dry on/off" kontakt
- Grijani kompresor i kućište vanjske jedinice

MODEL			ASH-09BIF	ASH-13BIF	ASH-18BIF	ASH-24BIF
Kapacitet hlađenje / grijanje	kW		2,6 / 2,8	3,5 / 3,7	5,1 / 5,3	6,5 / 6,5
Napajanje jedinice	Hz / V		1~ / 50 / 220-240	1~ / 50 / 220-240	1~ / 50 / 220-240	1~ / 50 / 220-240
SEER / SCOP	-		6,1 / 4,0	6,1 / 4,0	6,1 / 4,0	6,3 / 4,0
Energetski razred (A, W, C)	-		A++ / (A+, A++, A)	A++ / (A+, A+++, A)	A++ / (A+, A+++, A)	A++ / (A+, A+++, B)
Razina buke	UJ	dB(A)	39 / 36 / 32 / 28	42 / 38 / 34 / 31	49 / 44 / 39 / 34	49 / 44 / 41 / 39
	VJ	dB(A)	52	53	56	58
Dimenzije (Š x V x D)	UJ	mm/kg	790 x 275 x 200 / 9,0	845 x 289 x 209 / 10,5	970 x 300 x 224 / 13,5	1078 x 325 x 246 / 16,5
	VJ	mm/kg	776 x 540 x 320 / 29,5	848 x 596 x 320 / 31,0	899 x 596 x 378 / 39,0	955 x 700 x 396 / 52,5
Raspon radne temperature hlađenje/grijanje	°C		-15-43 / -22-24	-15-43 / -22-24	-15-43 / -22-24	-15-43 / -22-24

UJ / VJ = unutarnja jedinica / vanjska jedinica; A, W, C = prosječna, toplija, hladnija klima

Za detaljnu tehničku specifikaciju proizvoda, molimo pogledajte tehnički dio kataloga. Ova podatkovna tablica ne služi kao osnova za obradu projektnih dokumenata.

Rashladno sredstvo: R32 (jednokomponentno rashladno sredstvo HFC) s GWP (Potencijal globalnog zagrijavanja) 675.

DODATNA OPREMA

- Zdravi filteri
- GSM modul G2S
- Žičani upravljač SWC-02
- Centralni upravljač SCC-16